
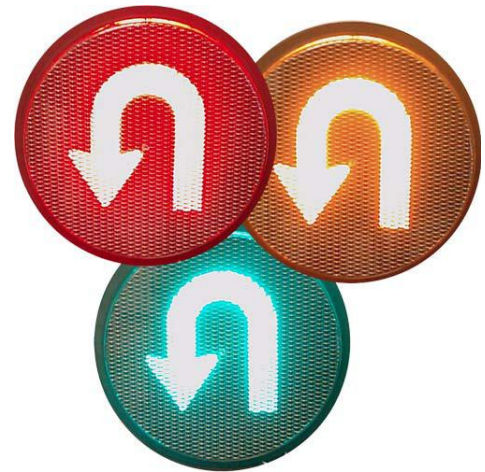


Certified by ISO9001 International Quality Control System

### JXC-300HFDT Series LED U-Turn Lamps

#### Features & Specifications

- Compliance with latest ITE specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliant to FCC Title 47
- Fully compatible with NEMA controllers/conflict monitors
- Uniform incandescent appearance with Hi-flux technology

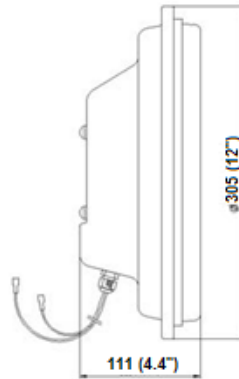

Model Number	JXC-300HFRDT	JXC-300HFYDT	JXC-300HFGDT
Size (mm)	300mm	300mm	300mm
Color (nm)	Red (626)	Yellow (592)	Green (505)
Voltage (Typical)	120V - 60hz	120V - 60hz	120V - 60hz
Voltage Range	80V - 135V	80V - 135V	80V - 135V
Power (w) Typical	10	16	10
Operation Temperature	-40°F to +165°F	-40°F to +165°F	-40°F to +165°F
Power Factor	> 0.9	> 0.9	> 0.9
T.H.D.	< 20%	< 20%	< 20%

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact us at (972) 480-0888 or visit our website at [www.trastarusa.com](http://www.trastarusa.com).